
EB-113

Injection Quill, Non-Retractable, Basic 1" MNPT x 3/4" Solution Tube



SPECIFICATIONS SAFETY RATING 150 psi - PVC, CPVC, PVDF 1500 psi - Alloy CHECK VALVE N/A SAF-T-SEAL TIP N/A QUICK DISCONNECT VALVE/PROCESS CONNECTION SIZE 1" MNPT INLET CONNECTION SIZE 1" MNPT SOLUTION TUBE SIZE 3/4" SOLUTION TUBE ID (PVC, CPVC) 0.742" SOLUTION TUBE ID (ALLOY) 0.824" SOLUTION TUBE OD (ALL) 1.050" (A) OPERATING LENGTH 3.50"

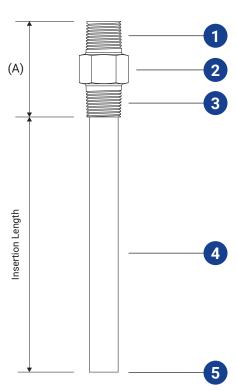

ORDERING INFORMATION PVC, CPVC, and PVDF

SERIES	SOLUTION TUBE MATERIAL	INSERTION LENGTH	TIP CONFIGURATION
EB-113	-	-	-
	P = PVC C = CPVC K = PVDF	2 = 2" 4 = 4" 6 = 6"	0 = Standard B = 45° Bevel

ALLOY

SERIES	SOLUTION TUBE MATERIAL	INSERTION LENGTH	TIP CONFIGURATION
EB-113	-	-	-
	H = HASTELLOY C276 S = 316SS A = Alloy 20	2 = 2" 4 = 4" 6 = 6" 8 = 8" 10 = 10" 12 = 12" 18 = 18" 24 = 24"	0 = Standard B = 45° Bevel

- Inlet Connection Thread
- 2 Installation Hex
- 3 Main Connection Thread
- 4 Solution Tube
- 5 Tip



Please contact our Asia Pacific distributor:

Phone: 0409 784 236 or 0421 795 353 info@h2orx.com.au