


# HS-300

## Heavy Service Retractable Injection Quill 3" Valve x 2-1/2" Tube



### SPECIFICATIONS

SAFETY RATING
<b>250 PSI</b>
CHECK VALVE
<b>OPTIONAL</b>
SAF-T-SEAL TIP
<b>N/A</b>
QUICK DISCONNECT
<b>N/A</b>
VALVE/PROCESS CONNECTION SIZE
<b>3"</b>
INLET CONNECTION SIZE
<b>2-1/2"</b>
SOLUTION TUBE SIZE
<b>2-1/2"</b>
SOLUTION TUBE ID
<b>2.469"</b>
SOLUTION TUBE OD
<b>2.875"</b>
(A) OPERATING LENGTH
<b>20.75"</b>
(B) VALVE/GLAND LENGTH
<b>15.5"</b>
EXTRACTION LENGTH
<b>36.25" + INSERTION LENGTH</b>

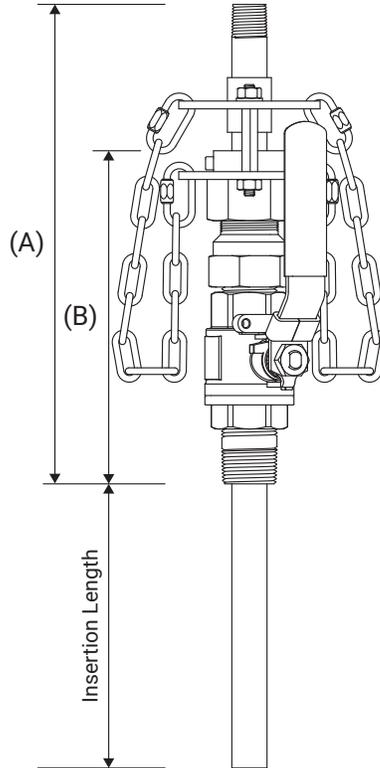

### ORDERING OPTIONS

SERIES	VALVE MATERIAL	SOLUTION TUBE MATERIAL	INSERTION LENGTH	TIP CONFIGURATION	CHECK VALVE SEAL
HS-300	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
	S = Stainless Steel	H = Alloy C276 S = 316SS A = Alloy 20 T = Titanium Gr.2	2 = 2" 4 = 4" 6 = 6" 8 = 8" 10 = 10" 12 = 12" 18 = 18" 24 = 24"	0 = Standard B = 45° Bevel DH = Diffuser Holes	00 = No Check Valve 05 = Alloy, FKM 06 = Alloy, EPDM

### TECH NOTES

- When selecting alloy check valves options, the body material of the check valve is the same as the solution tube material.
- Diffuser hole configurations to be determined by customer. SAF-T-FLO does not provide recommendations regarding diffuser hole layouts.
- The HS-300 series encompasses ordering options previously offered under the EB-151 series.

