



VAN LONDON
Est. 1961



"When Accuracy Matters"

Toroidal Conductivity Sensor



Part # CSPETNN

The Van London Co. (VLC) Toroidal Conductivity is perfect for applications that would foul or attack the metal of contacting sensors. Toroidal sensors are also desired for use in high conductivity ranges or % concentration. Primary features include: low cost, durable Polypropylene construction, submersible or in-line mounting, and ease of maintenance. These sensors can be paired with the Knick analyzer or others commercially available.

SPECIFICATIONS

MAX. PRESSURE/TEMP. RATINGS:

Standard Sensor - 100 PSIG at 95°C
High Temp Sensor - 50 PSIG at 130°C

WETTED MATERIALS:

Polypropylene

COMPATIBILITY VERIFIED FOR:

Knick.....2401, 2402, 2405, Condi
GLI-Hach.....E33, E53, E63, PRO 3
Uniloc.....1181T
Yokogawa.....ISC202, ISC402
Mettler-Toledo

CONNECTIONS:

Process - 3/4" MNPT
Electrical - 20ft (6m) cable

CELL CONSTANT:


Nominal 4.8

MAX FLOW RATE:

10 ft / second

TEMPERATURE ELEMENT:

Pt1000 RTD, others on request

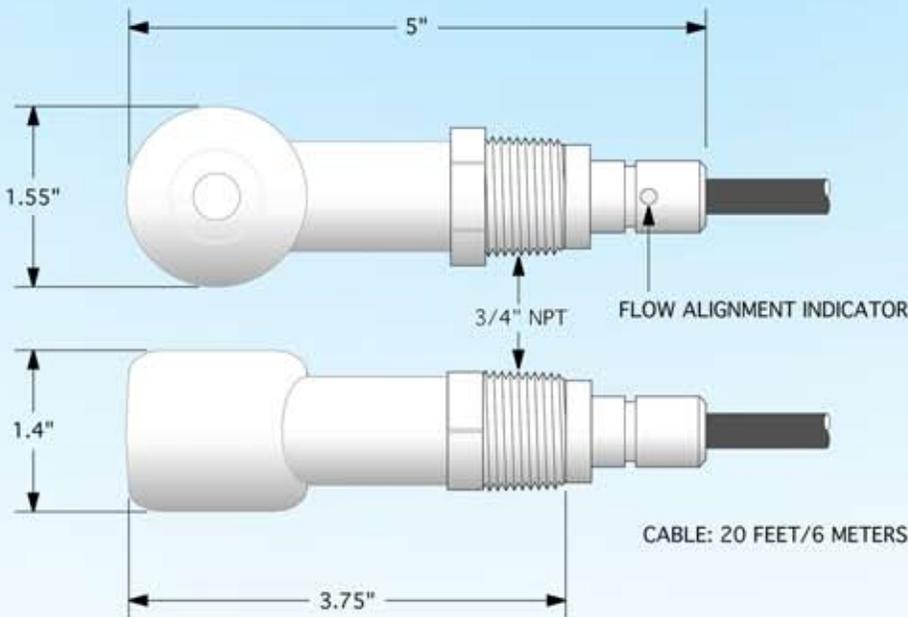

Van London-pHoenix Co.

Please contact our Asia Pacific distributor:

H2O Rx

Phone: 0409 784 236 or 0421 795 353

info@h2orx.com.au

www.h2orx.com.au

